




BUZZSAW/C²


Drilling Specifications

Pin Position



The Buzzsaw's 12:00 pin, relative to the CG, makes this ball driller friendly for right & left-hand bowlers.

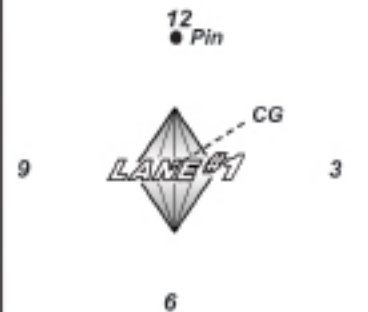

Turning the pin towards 3 O'clock, relative to the CG, will increase length.

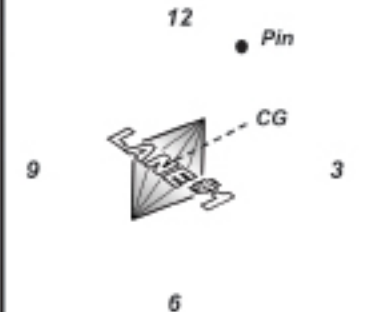

Turning the pin towards 9 O'clock, relative to the CG, will decrease length.

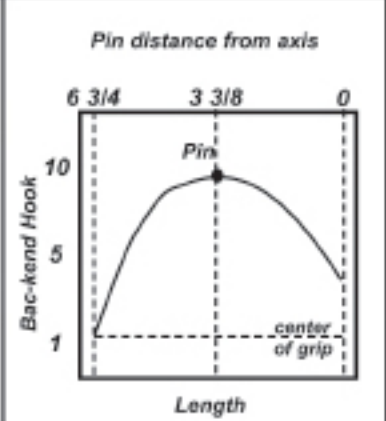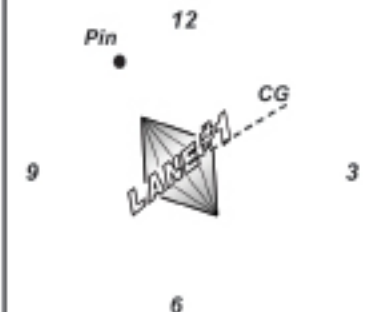

Drilling Recommendations

Label	Label	Max Leverage	CG Leverage
Length 7 Back-end 9	Length 2 Back-end 2	Length 5 Back-end 10	Length 4 Back-end 8

Thumb Leverage	CG Axis	Pin Axis	Notes
			<ol style="list-style-type: none"> 1. Pos. side, finger, & top wt., increase length and back-end. 2. Neg. side, thumb, & bottom, decrease length and back-end. 3. Axis holes decrease flare and back-end reaction. 4. Pin-in balls decrease length. 5. Pin-out balls increase length and flip. 6. If ending center of gravity is on your pin, CG or on the same rotational plane as those, reaction is enhanced.
Length 3 Back-end 9	Length 5 Back-end 5	Length 10 Back-end 4	