



# Buzzsaw/C Super Carbide


## Drilling Specifications

### Pin Position


The Buzzsaw's 12:00 pin, relative to the CG, makes this ball driller friendly for right & left-hand bowlers.




Turning the pin towards 3 O'clock, relative to the CG, will increase length.



Turning the pin towards 9 O'clock, relative to the CG, will decrease length.



Pin distance from axis

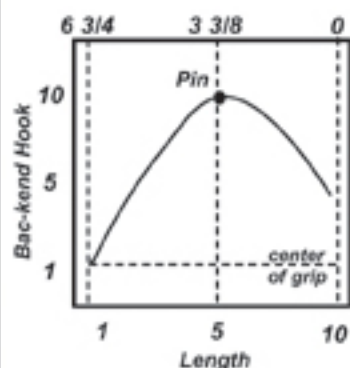

### Drilling Recommendations

Label	Label	Max Leverage	CG Out Leverage
Length 7 Back-end 8	Length 2 Back-end 2	Length 5 Back-end 10	Length 3 Back-end 6

Thumb Leverage	CG Axis	Full Roller	Notes
			<ol style="list-style-type: none"> <li>1. Pos. side, finger, &amp; top wt., increase length and back-end.</li> <li>2. Neg. side, thumb, &amp; bottom, decrease length and back-end.</li> <li>3. Axis holes decrease flare and back-end reaction.</li> <li>4. Pin-in balls decrease length.</li> <li>5. Pin-out balls increase length and flip.</li> <li>6. If ending center of gravity is on your pin, CG or on the same rotational plane as those, reaction is enhanced.</li> </ol>
Length 4 Back-end 9	Length 5 Back-end 7	Length 4 Back-end 9	